



MPDT/R3328/3530/4035/4540


Appliance Specifications

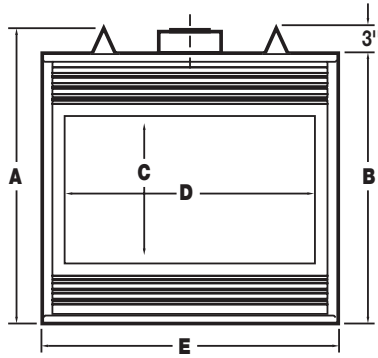


Front View




Right Side View



Gas Line Location



Clearance to Soffit or Over Hang




Top View

	A	B	C	D	E	F	G	H	J	K	L
MPD3328	33-1/8"	30-1/8"	17"	27-12"	33-1/8"	19-5/8"	21-1/2"	10-3/4"	6-13/16"	13"	8-11/32"
MPD3530	35-1/8"	32-1/8"	19"	29-1/2"	35-1/8"	21-11/16"	24-7/8"	12-7/16"	9"	16"	9"
MPD4035	40-1/8"	37-1/8"	24"	34-1/2"	40-1/8"	26-11/16"	29-7/8"	14-15/16"	9"	16"	9"
MPD4540	40-1/8"	37-1/8"	24"	39-1/2"	45-1/8"	26-11/16"	34-7/8"	17-7/16"	9"	16"	9"


Fireplace Finishes

Wall Details


Complete finished interior wall. To install the appliance facing flush with the finished wall, position framework to accommodate the thickness of the finished wall.

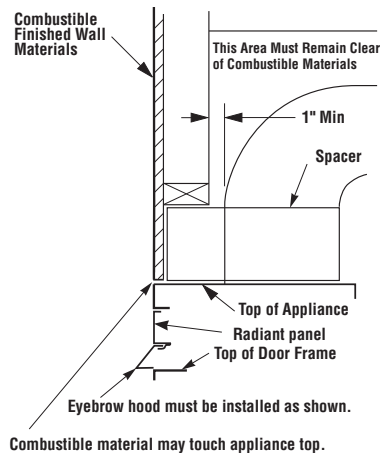

Clean Face Models

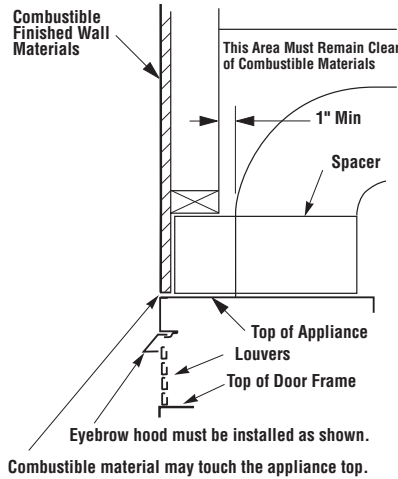

Louver Face Models

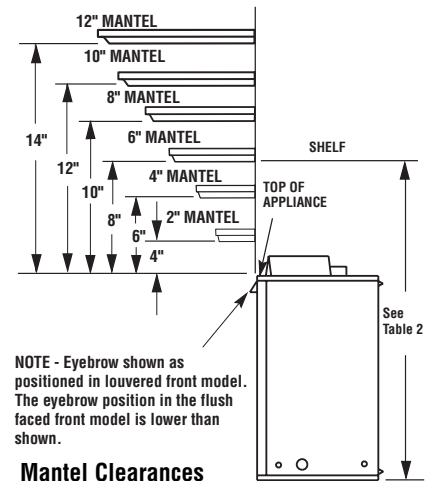

Mantel Clearances

Shelf Clearance

To provide for the lowest possible shelf surface use the alternate rear vent outlet with attached venting routed in a way to minimize obstructions to the use of the space above the appliance. The minimum height from the base of the appliance to the underside of combustible materials used to construct a utility shelf in this fashion is shown in *Table 2*. The weight of the utility shelf and anything placed upon it may not be supported by the appliance in anyway.

Table 2

	Shelf Height
MPD3328	33-1/4"
MPD3530	35-1/4"
MPD4035	40-1/4"
MPD4540	40-1/4"

MPDT/R3328/3530/4035/4540


Clearances

The appliance is approved with zero clearance to combustible materials on all sides with the following exception: When the unit is installed with one side flush with a wall, the wall on the other side of the unit must not extend beyond the front edge of the unit. In addition, when the unit is recessed, the side walls surrounding the unit must not extend beyond the front edge of the unit. See Table 1.


Table 1

Back	1/2"-0" spacers
Sides	1/2"-0" spacers
Top Spacers	0"
Floor	0"
From Bottom of Unit to Ceiling	64"
Vent	1"*
Service Clearances	
Front	3 feet

*Note: 3" above any horizontal vent component.

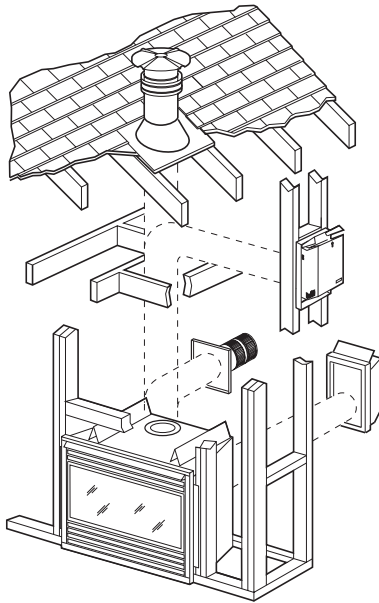

Typical Installation

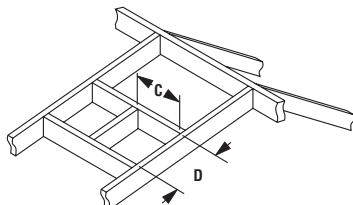


Roof Framing

Roof Framing Dimensions

Pitch	C	D
0/12	10"	10"
6/12	10"	12"
12/12	10"	17 3/4"

Framing Specifications

Note: Nailing flange is adjustable from 5/8" to 1/2".

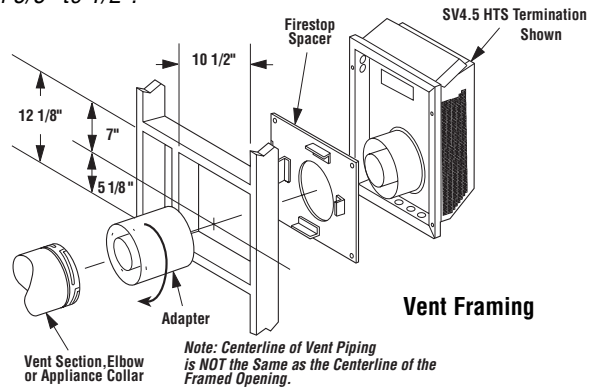


Vent Framing

Note: Centerline of Vent Piping is NOT the Same as the Centerline of the Framed Opening.


Vent Clearance

	Top	Sides	Bottom
Horizontal	3"	1"	1"
Vertical	1"	1"	1"

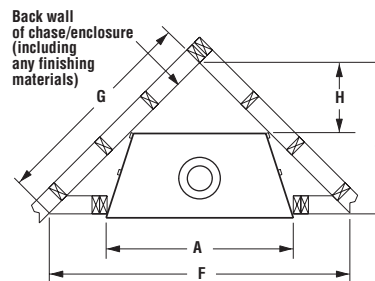

Corner

Framing should be constructed of 2x4 or larger lumber.

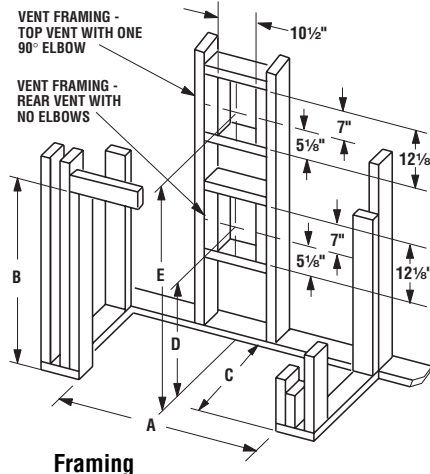

Framing

	A	B	C	D	E	F	G	H	J
MPD3328	33-1/4"	33-1/4"	13"	19-5/8"	37-1/8"	48-1/2"	34-5/16"	11-3/4"	24-1/4"
MPD3530	35-1/4"	35-1/4"	16"	21-11/16"	39-1/8"	57-1/2"	40-5/8"	13-1/4"	28-3/4"
MPD4035	40-1/4"	40-1/4"	16"	26-11/16"	44-1/8"	61-3/16"	43-11/32"	15-3/16"	30-11/16"
MPD4540	45-1/4"	40-1/4"	16"	26-11/16"	44-1/8"	66-3/8"	46-15/16"	17-11/16"	33-3/16"

Note: All dimensions calculated for 1/2" dry wall at the appliance face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.